


TECHNICAL SPECIFICATION:

- 1.The goods meet the related standard of IEC 60099-4.
- 2.Rated Voltage :10kV
- 3.Creepage distance:330mm.
- 4.Continuous operating voltage:8.4kV
- 5 DC 1mA reference voltage: 15kV.
- 6.The leakage current of 0.75-fold U1mA reference voltage \leq 30 μ A.
- 7.Frequency 1mA reference voltage: \geq 10kV.
- 8.Continuous operating voltage resistive current: \leq 200 μ A.
9. Partial discharge at: 1.05 times the continuous operating voltage: \leq 10pC.
10. High current impulse (4/10μs): 100kA.
11. 8/20 μ s lightning current impulse residual voltage: \leq 30kV.
12. 2000 μ s square wave current capacity: 250A.

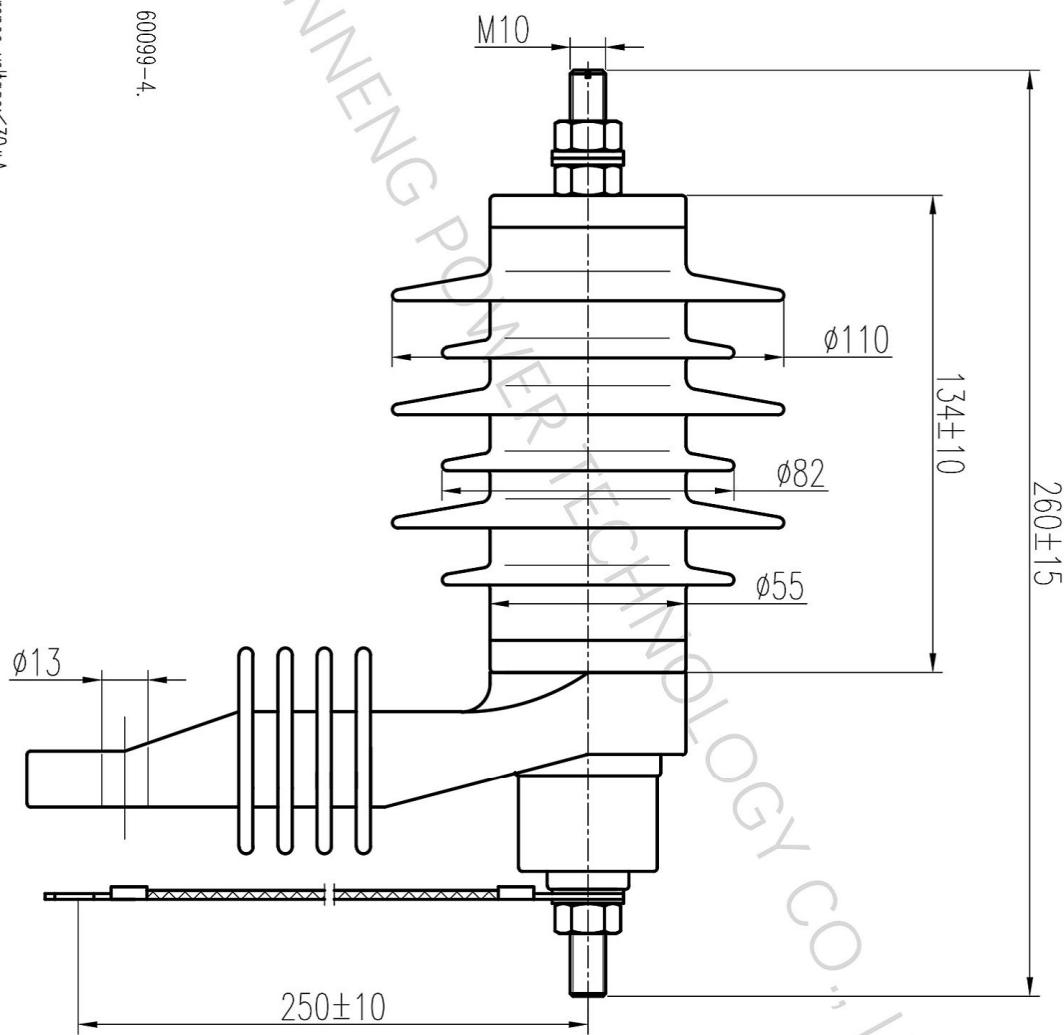

ZHEJIANG YUANNENG POWER TECHNOLOGY CO.,LTD.		DRAWN:	
		CHECKED:	
MATERIAL:		ISSUE DT:	/ /
REF NOTE		TITLE:	
SCALE:	DO NOT SCALE.	YH10W-10P	