


452±15

326±10

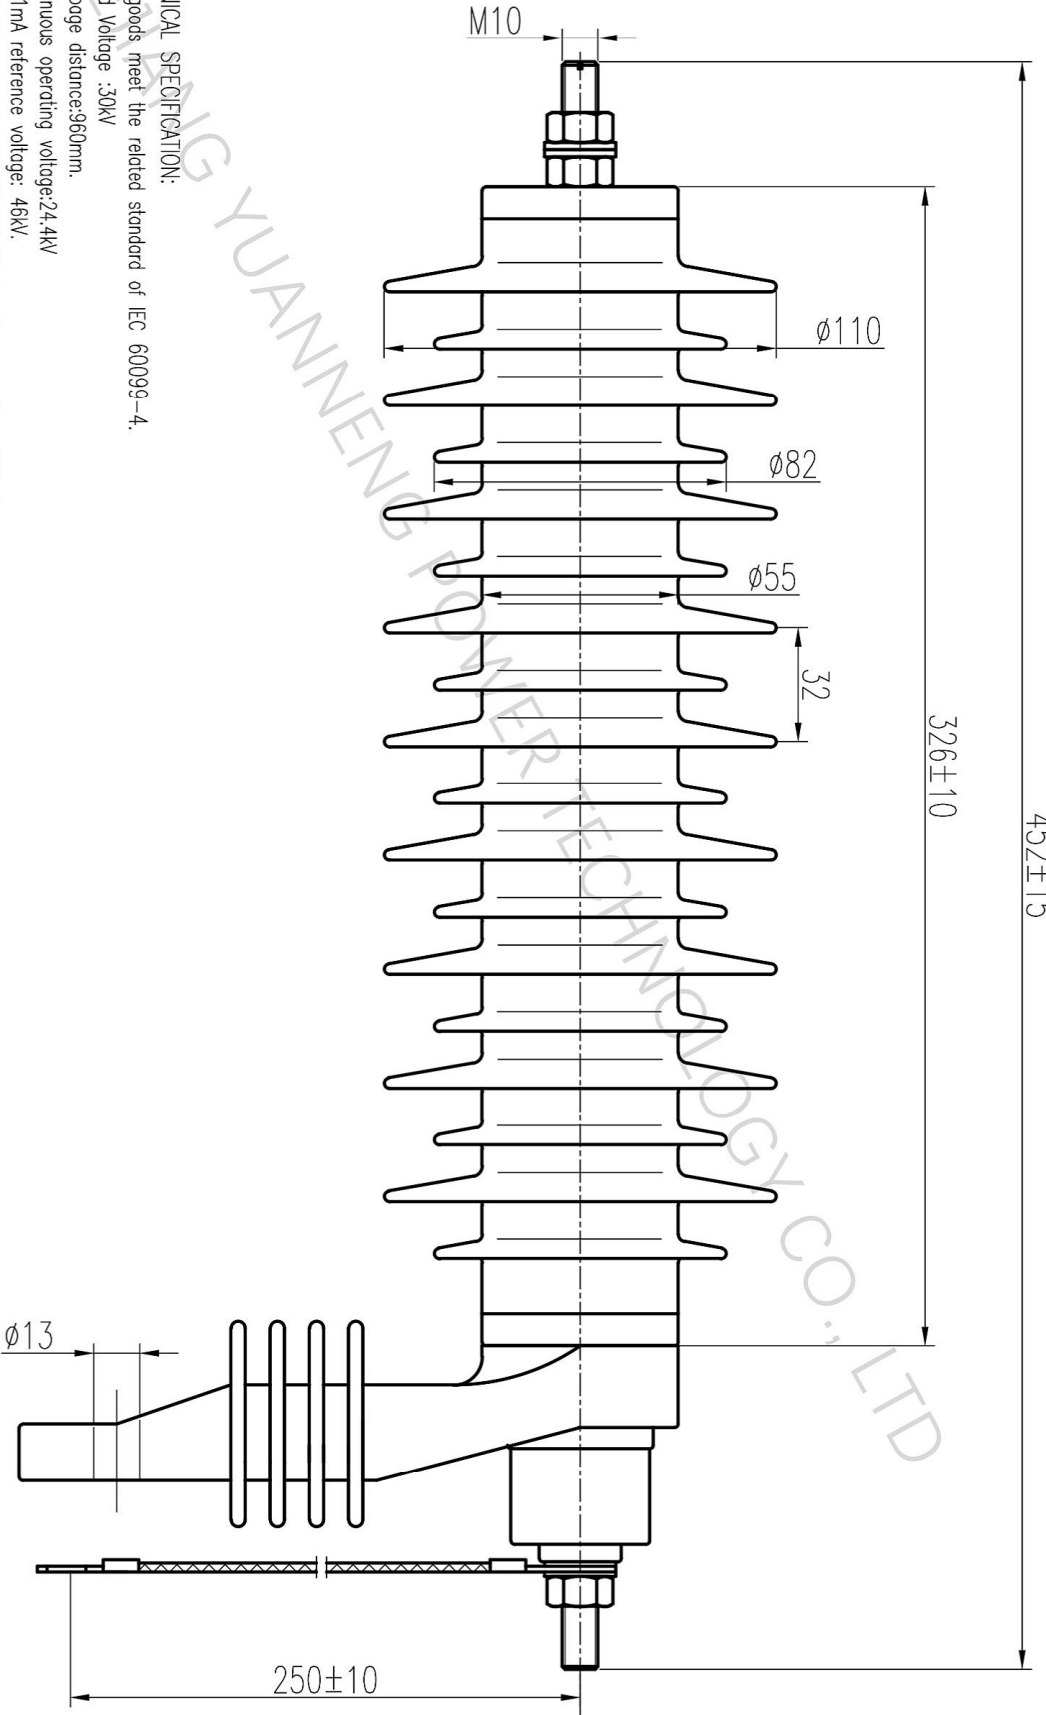

TECHNICAL SPECIFICATION:

- 1.The goods meet the related standard of IEC 60099-4.
- 2.Rated Voltage :30kV
- 3.Creepage distance:960mm.
- 4.Continuous operating voltage:24.4kV
- 5 DC 1mA reference voltage: 46kV.
- 6.The leakage current of 0.75-fold U1mA reference voltage:≤50 μA.
- 7.Frequency 1mA reference voltage:≥30kV.
- 8.Continuous operating voltage resistive current:≤200 μA.
9. Partial discharge at 1.05 times the continuous operating voltage: ≤10pC.
10. High current impulse (4/10 μs): 100kA.
11. 8/20 μs lightning current impulse residual voltage:≤90kV.
12. 2000 μs square wave current capacity: 250A.

ZHEJIANG YUANNENG POWER TECHNOLOGY CO.,LTD.		DRAWING NO.	
MATERIAL: REF NOTE		CHECKED:	TITLE:
ISSUE DT: / /		DO NOT SCALE.	YH10W-30P
SCALE:			